



DISPENSING SOLUTIONS

# AXON A2000

## Compact footprint. The greatest performance.

With outstanding electronics and hydraulics and a sleek design built by premium construction and materials, the AXON A2000 is the right choice for those who are looking for high performance but must deal with the limited space available at the forecourt.



Up to  
130l / min



Multiple  
Fuel Types



Up to 2  
Fuel Grades



Up to  
2 Hoses

### Maximum efficiency aligned with a great user experience.

#### SOLID CONSTRUCTION FRAME

**Frame:**  
galvanized steel with double coated painting

**Housing:**  
stainless steel

**Image Panels:**  
aluminium with double coated painting

#### TOUCHSCREEN WITH A MODERN LOOK AND FEEL

With tempered glass for direct digital print on glass for enhanced usability and greater user experience.

#### EASIER MAINTENANCE AND SERVICEABILITY

The new panels combined with greater depth in the interior provide practical access to all the regulation components when necessary, which is key for easier maintenance.

#### HOSE RETRACTION SYSTEM AND LIFTING SOLUTION FOR AN EASY HANDLING

3,8 meters | partial retraction.

#### CUSTOMIZATION PANELS FOR A BIGGER ADVERTISING AREA

More options to get your brand in front of your customer.



The A2000 is a multitasking and versatile model. The lateral hoses allow easy access to the 2 products at the same time.

**Certificate: ATEX | MID**

# AXON A2000

## Durable and larger display



- Crisp digits under any lighting conditions
- Maximum flexibility with minimalist design
- Intuitive touchscreen


## Enhanced hydraulics



- Aluminum alloy obtained through injection under pressure
- Inlet suction lines aligned for the entire range
- Meter with electronic calibration
- P-Flux connected to electronics for error management
- Quick coupling connection for the meter

## ✓ TECHNICAL SPECS

<b>ADMISSION</b>	Suction: High Performance Compact Gear Pump PPS Pressure: Submersible Pump	<b>HOSE</b>	Ø16, 19, 21, 25 mm (EN1360/EN13483) (VR2 approved)
<b>METER</b>	Positive displacement meter AXON PTF, with pulse generator	<b>NOZZLE</b>	Automatic ZVA2 or others
<b>FILTERS</b>	Reusable stainless steel, 100 µm mesh	<b>FLOW RATES</b>	10, 40, 80, 130 l/min
<b>MOTOR</b>	Eexd, single/three-phase, 50/60 Hz w/ internal thermal protection	<b>COMMUNICATION PROTOCOLS</b>	Petrotec, EP55, ER3, IFSF IP, IFSF Lon, HDX 485 and HDX 2WI (Gilbarco), Dunclare, Pumalan, HDX IP (Tesco)
<b>CALCULATOR</b>	iMC		
<b>OPTIONS</b>	Speed Selector • Voice Module • Electro-mechanical totalizers • Volume and amount preset • Circuit breaker • Main safety switch (LPG) • Electronics head heating • Vapour recovery stage II • Vapour recovery with monitoring • Automatic temperature compensation • Single / Three Phase Motor • Satellite ready (1 per side) • Breakaway couplings • Custom nozzles and satellite, Flexible riser connection • Foundation frame • Custom corporate image • Stainless steel AISI316 housing		

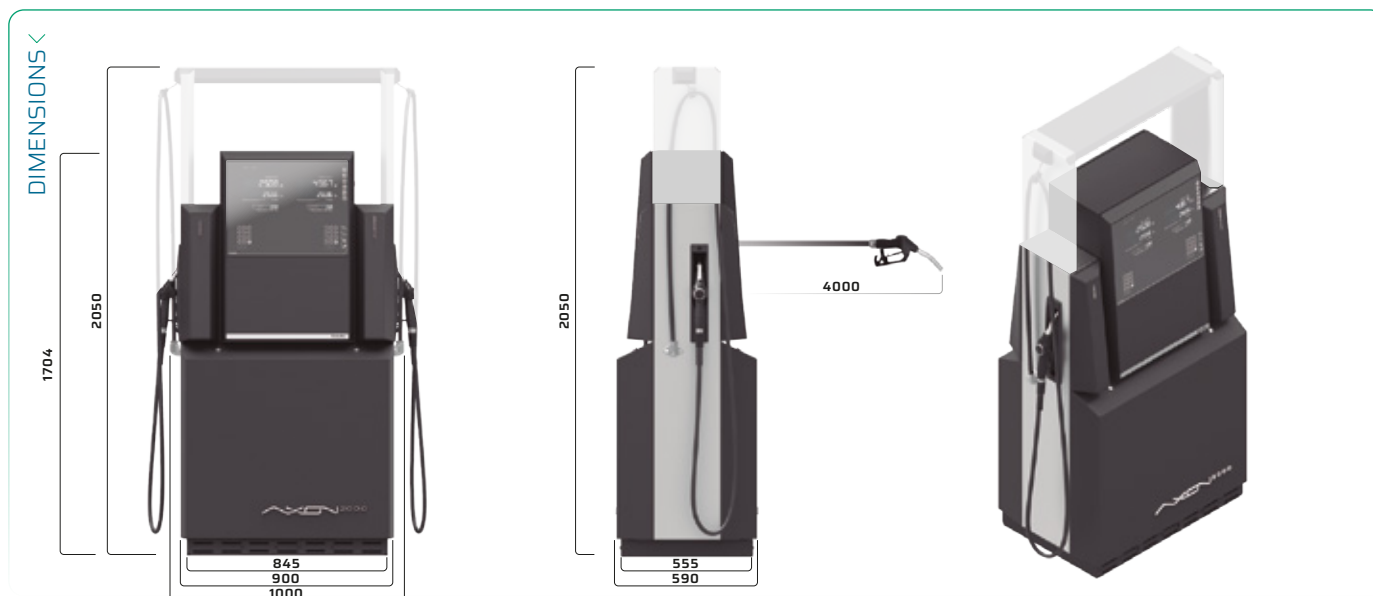

[www.petrotec.com](http://www.petrotec.com)

© 2024 Petrotec Group | All rights reserved. Petrotec, the Petrotec logo, Axon and combinations thereof are registered trademarks of Petrotec Group. Other names are informational and may be trademarks of their respective owners. Petrotec is continuously improving its products. Changes on the specifications may occur without prior notice. The imagery used may be indicative of style only. The available brochures are a guide and do not constitute an offer or contract.

